






FOLLOW LOCAL CODES FOR ALL WORK.

DETAIL PROVIDED FOR BLOCKING & UTILITY REQUIREMENTS. REFER TO MANUFACTURER'S INSTALLATION GUIDE FOR ADDITIONAL INFORMATION.

PROVIDE ADEQUATE FRAMING & BLOCKING TO SUPPORT APPROXIMATELY 55 POUNDS STATIC LOAD AND A MINIMUM MOMENT OF 203 FT LBS. FRAMING SHOULD ALLOW ALL FOUR MOUNTING BOLTS TO ENTER SOLID WOOD. MOUNTING MATERIALS SUPPLIED AND INSTALLED BY CONTRACTOR.

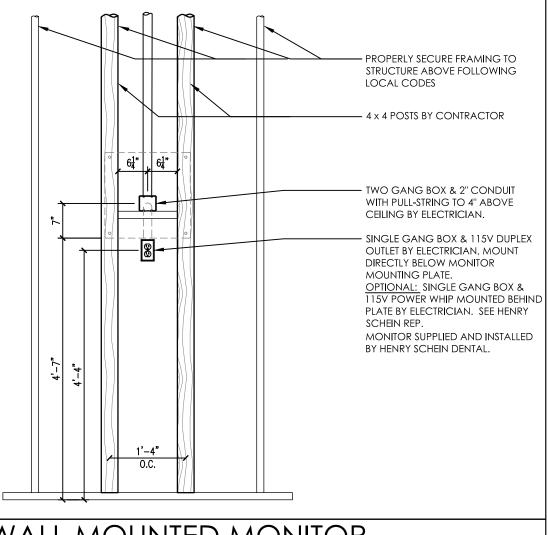


39A

A-DEC 585 WALL MOUNTED MONITOR

NOT TO SCALE






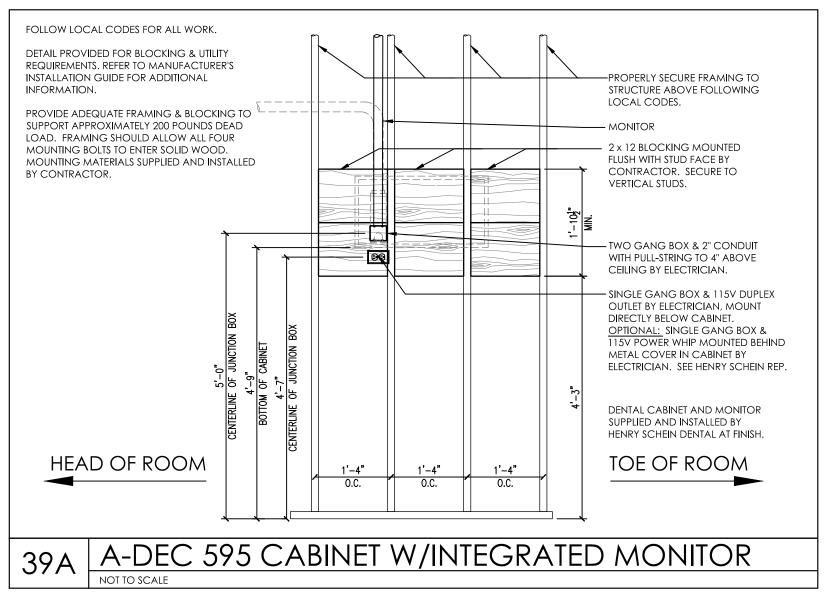






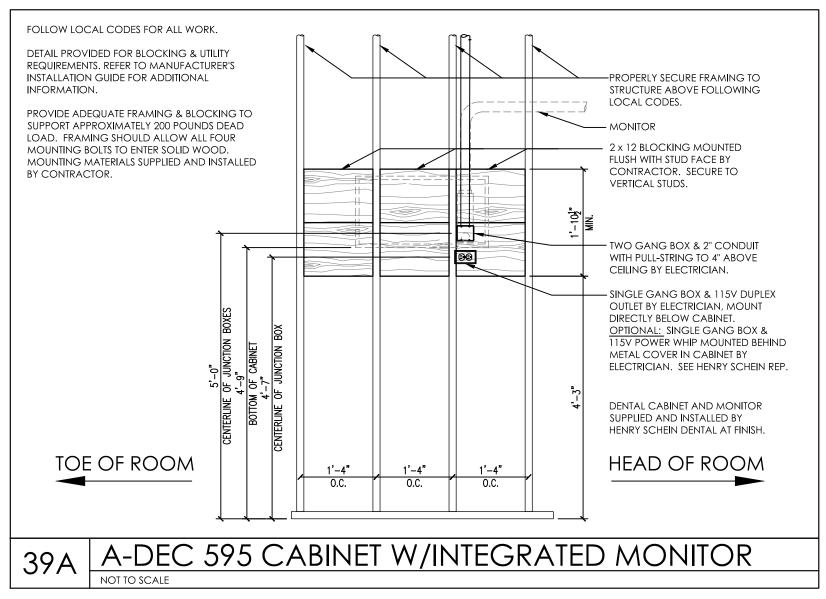





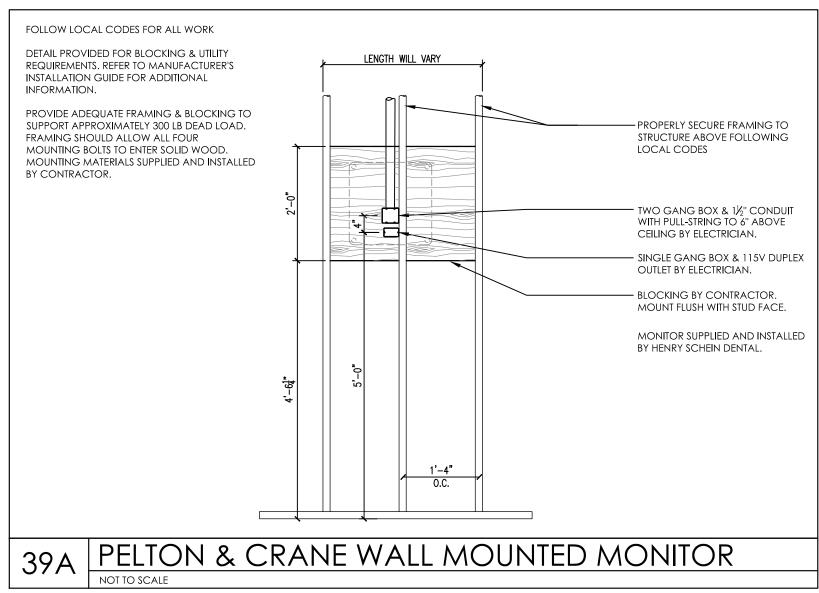






DENTAL FOLLOW LOCAL CODES FOR ALL WORK. DETAIL PROVIDED FOR BLOCKING & UTILITY REQUIREMENTS. REFER TO MANUFACTURER'S INSTALLATION GUIDE FOR ADDITIONAL PROPERLY SECURE FRAMING TO INFORMATION. STRUCTURE ABOVE FOLLOWING LOCAL CODES PROVIDE ADEQUATE FRAMING & BLOCKING TO SUPPORT APPROXIMATELY 200 POUNDS DEAD 4 x 4 POSTS BY CONTRACTOR LOAD. FRAMING SHOULD ALLOW ALL FOUR MOUNTING BOLTS TO ENTER SOLID WOOD. MOUNTING MATERIALS SUPPLIED AND INSTALLED BY CONTRACTOR. TWO GANG BOX & 11/3" CONDUIT WITH PULL-STRING TO 6" ABOVE CEILING BY ELECTRICIAN. SINGLE GANG BOX & 115V DUPLEX OUTLET BY ELECTRICIAN. MONITOR SUPPLIED AND INSTALLED BY HENRY SCHEIN DENTAL. 5'-0" PELTON & CRANE WALL MOUNTED MONITOR 39A NOT TO SCALE






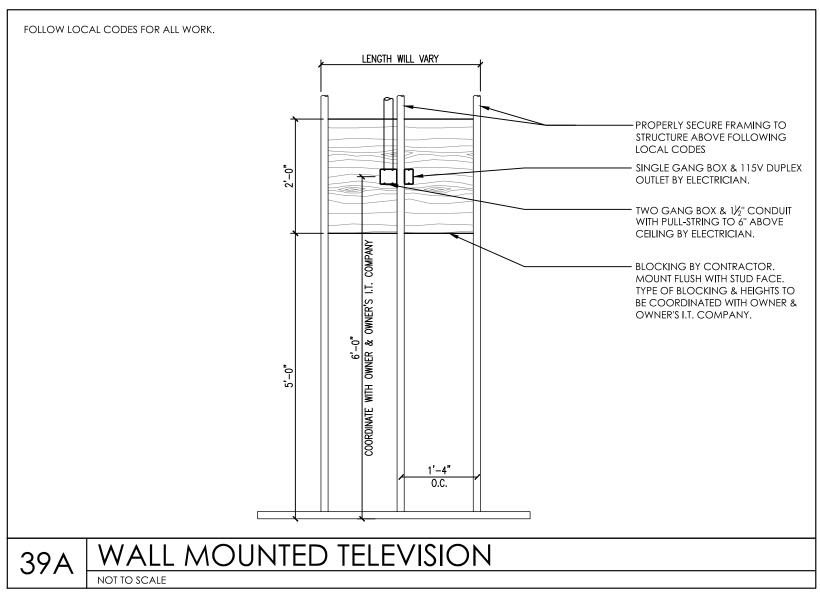






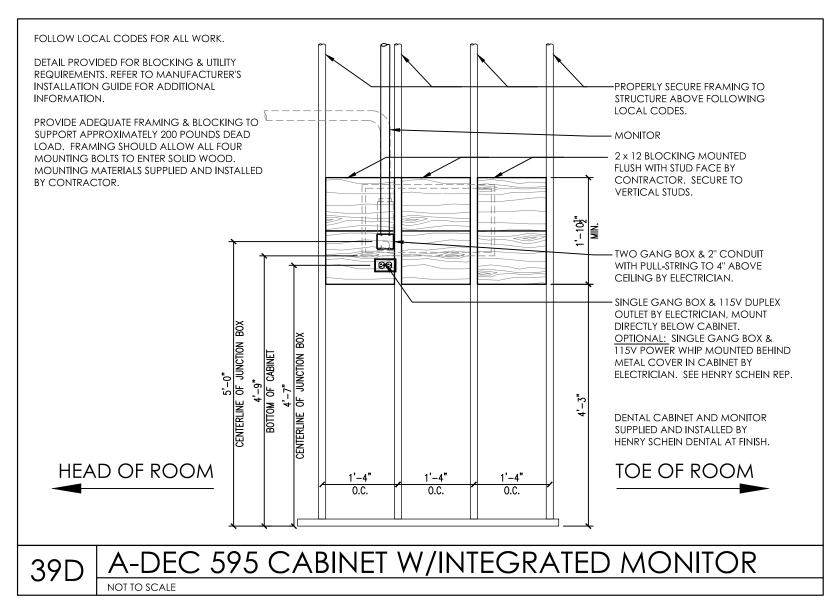

\*\*FOR REFERENCE ONLY NOT FOR CONSTRUCTION\*\*





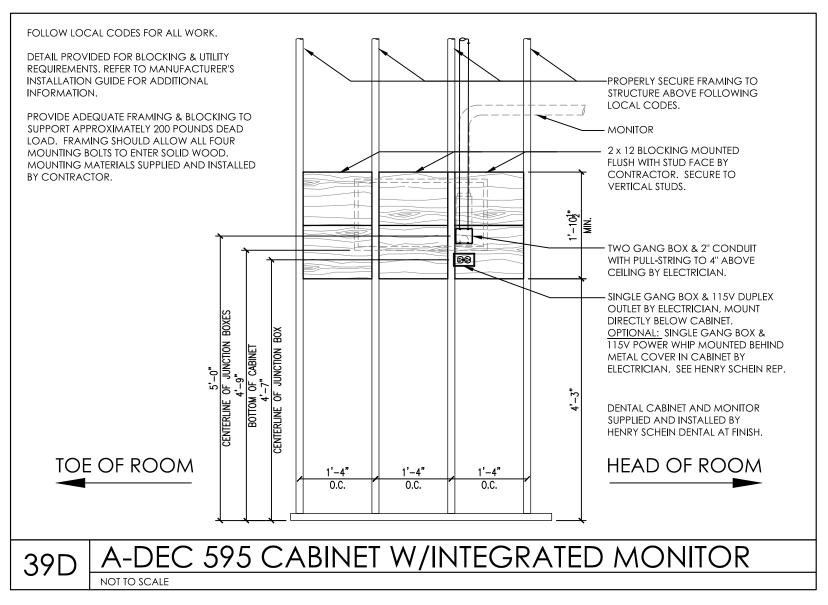

\*\*FOR REFERENCE ONLY NOT FOR CONSTRUCTION\*\*





